

M2R-25-9-X-TXL Optical Multi-Protocol Video SFF 2x5 Dual Receivers -- 1.5 GBaud --- +3.3V



ORDERING INFORMATION

M2R - 25 - 9 - X - T X L

+3.3V POWER SUPPLY

ALIGNMENT/SIGNAL PIN LENGTH
Blank = .125"
D = .180"

SIGNAL DETECT
T - TTL Signal Detect Output

WAVELENGTH
1 - 850 nm (multimode)
2 - 1310nm FP (Single Mode) 2km

PROTOCOL
9 - Multi-Protocol Video
1MBaud to 1.5GBaud



Optoelectronic Products

7444 West Wilson Avenue • Chicago, IL 60656
(708) 867-9600 • (800) 323-6858 • Fax: (708) 867-0996
email:optoinfo@stratoslightwave.com
http://www.stratoslightwave.com

Features

- 1.5Gbps SMPTE-292 Performance
- TTL Signal Detect Output
- Low profile fits Mezzanine Card Applications
- AC coupled PECL level Outputs
- Single +3.3V Power Supply
- Wave Solderable / Aqueous Washable
- UL 1950 Approved

PRODUCT OVERVIEW

The M2R-25-9-1-TXL Dual Small Form Factor (SFF) optical receiver modules are high performance integrated duplex data links for uni-directional communication over multimode or single mode optical fiber. The M2R-25-9 receivers are designed to receive a wide range of data rates from 1Mbps to 1.5Gbps. These receivers are compatible with the following standards:

- SMPTE-292 (HDTV -- @ 1.5Gbps)
- SMPTE-259 (SDTV/ D1 -- @ 270Mbps)
- IEEE-1394B (Firewire --- @ 200Mbps to 800Gbps)
- MPEG2 (Compressed HDTV -- @ 5 to 40Mbps)
- SPDIF (Sony Phillip Digital Interconnect Format -- @ 2.8224Mbps)
- SDTI (Serial Data Transport Interface ---@ 270Mbps)

The M2R-25 dual receiver modules are provided with the LC receptacle which is compatible with the industry standard LC connector. The Stratos Lightwave SFF receiver modules measure 0.532 inches in width.

This optoelectronic dual receiver module is designed to operate with transmitter that is class 1 laser product compliant with FDA Radiation Performance Standards, 21 CFR Subchapter J. This component is also class 1 laser compliant according to International Safety Standard IEC-825-1.

SHORT WAVELENGTH RECEIVERS

The use of short wavelength integrated PIN pre-amp subassemblies and high volume production processes has resulted in a low cost, high performance product available in various data transfer rates up to 1.5 GBaud.

ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	MIN	MAX	UNITS	NOTES
Storage Temperature	Tstg	-40	85	°C	
Supply Voltage	VccT, VccR		6.00	V	Vcc - ground
Data AC Voltage	Tx+, Tx-		2.6	Vpp	Differential
Data DC Voltage	Tx+, Tx-	-10	10	Vpk	V (Tx+ or Tx-) - ground

RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Ambient Operating Temperature	Ta	0		70	°C	
Supply Voltage	Vcc	3.0	3.3	3.6	VDC	
Baud Rate	BRate	1		1500	MBaud	

M2R-25-9-X-TXL Optical Multi-Protocol Video SFF 2x5 Dual Receivers -- 1.5GBaud --- +3.3V



MODULE SPECIFICATIONS - ELECTRICAL

0°C<Ta<70°C, 3.0<Vcc<+3.6V

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
Supply Current	Icc		200	225	mA	Ta = 25°C, Vcc = 3.3 V
	Icc			250	mA	0° C <Ta< 70°C, 3.0 V< Vcc <3.6V
RECEIVER						
PECL Outputs (Differential)		600	1200	1860	mVpp	AC coupled outputs
Total Jitter ¹	TJ			150	psec	
TTL Signal Detect Output - Low				0.5	V	IOL = -1.6 mA, 1 TTL Unit Load
TTL Signal Detect Output - High		2.4	3.0		V	IOH = 40µA, 1 TTL Unit Load

M2R-25-9-1-TXL OPTICAL SPECIFICATIONS -- 850 nm Laser Multimode

0°C<Ta<70°C, 3.0<Vcc<+3.6V

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
FIBER LENGTH						
50 µm Core Diameter MMF		550	1000		m	BER < 1.0E-12 @ 1.5 GBaud
62.5 µm Core Diameter MMF		300 ²	500		m	BER < 1.0E-12 @ 1.5 GBaud
RECEIVER						
Optical Input	λ	770		860	nm	
Optical Input Power	Pr	-17		0	dBm	BER < 1.0E-12
Optical Return Loss	ORL	12			dB	
Signal Detect - Asserted	Pa			-17	dBm	measured on transition - low to high
Signal Detect - Deasserted	Pd	-29			dBm	measured on transition - high to low
Signal Detect - Hysteresis	Pa - Pd		1.5	5.0	dB	

M2R-25-9-2-TXL OPTICAL SPECIFICATIONS -- 1310nm FP Laser single mode

0°C<Ta<70°C, 3.0<Vcc<+3.6V

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	NOTES
FIBER LENGTH						
9.0 µm Core Diameter SMF		2			km	BER < 1.0E-12 @ 1.5 GBaud
RECEIVER						
Optical Input	λ	1270		1355	nm	
Optical Input Power	Pr	-20		-3	dBm	BER < 1.0E-12
Signal Detect - Asserted	Pa			-20	dBm	measured on transition - low to high
Signal Detect - Deasserted	Pd	-29			dBm	measured on transition - high to low
Signal Detect - Hysteresis	Pa - Pd		1.5	5.0	dB	

Note¹ - Measured with 2²³ - 1 Pseudorandom bit Sequence.

Note² - This is the link length for at least 95% of the installed fibre base.



Optoelectronic Products

7444 West Wilson Avenue • Chicago, IL 60656
(708) 867-9600 • (800) 323-6858 • Fax: (708) 867-0996
email: optoinfo@stratoslightwave.com
http://www.stratoslightwave.com

M2R-25-9-X-TXL Optical Multi-Protocol Video SFF 2x5 Dual Receivers -- 1.5GBaud --- +3.3V



TERMINATION CIRCUITS

Output from the M2R-25 dual receiver module is AC coupled PECL level and is expected to drive into a 75 ohm load. Different termination strategies may be required depending on the particular De-Serializer chip set used.

The M2R-25 product family is designed with AC coupled outputs to provide the following advantages:

- Close positioning of De-Serializer with respect to dual receiver; allows for shorter line lengths and at gigabit speeds reduces EMI.
- Minimum number of external components.
- Internal termination reduces the potential for unterminated stubs which would otherwise increase jitter and reduce transmission margin.

Subsequently, this affords the customer the ability to optimally locate the De-Serializer as close to the M2R-25 as possible and save valuable real estate on PCI cards and other small circuit assemblies. At gigabit rates this can provide a significant advantage resulting in better transmission performance and accordingly better signal integrity.

AC coupling allows the Stratos Lightwave M2R-25 to be applied across a wider range of applications without modification. This benefits users in terms of enhanced RF performance, reduced component count, tighter layout and fewer design problems.

Figure 1 illustrates the recommended receive data line terminations and Figure 2 describes an alternative termination approach. Figure 3 illustrates a Thevenin equivalent 50 ohm termination circuit for the De-Serializer receiver input data lines, which require a +3.3V PECL termination. Other equivalent circuits can be readily calculated for other bias voltages.

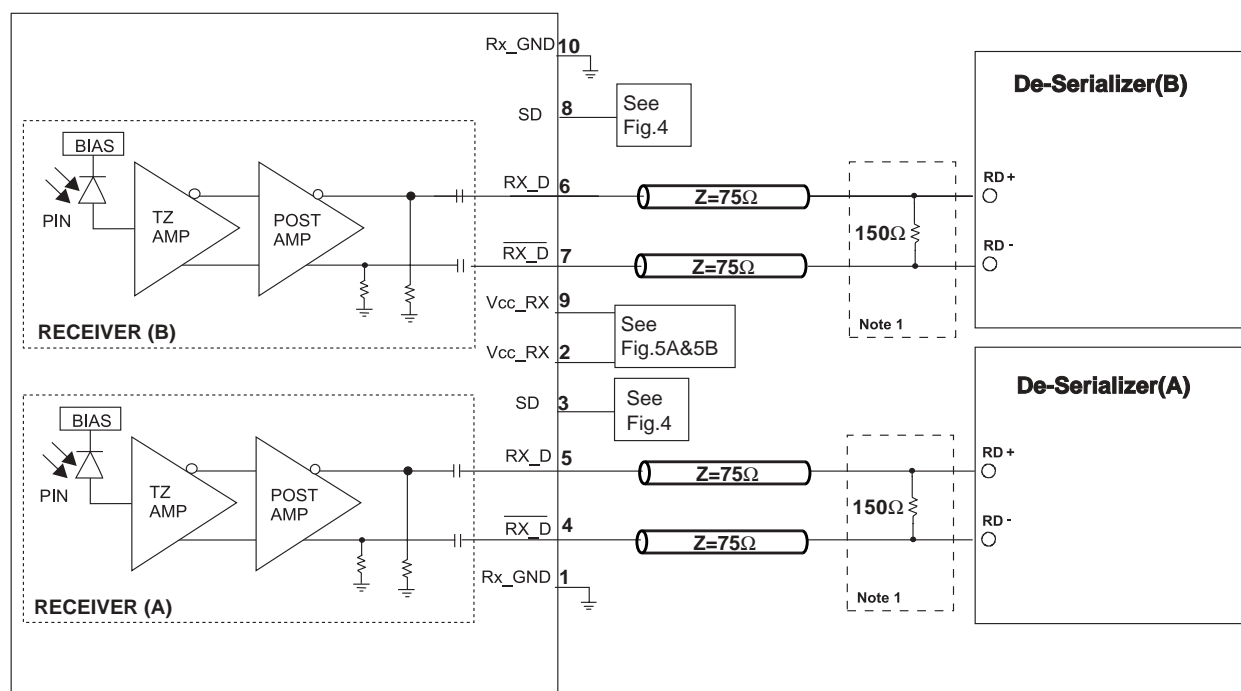


Figure 1. Recommended RECEIVE Data Terminations

Notes:

1. Consult De-Serializer manufacturer's data sheet and application data for appropriate receiver input biasing and termination network.

M2R-25-9-X-TXL Optical Multi-Protocol Video SFF 2x5 Dual Receivers -- 1.5GBaud --- +3.3V

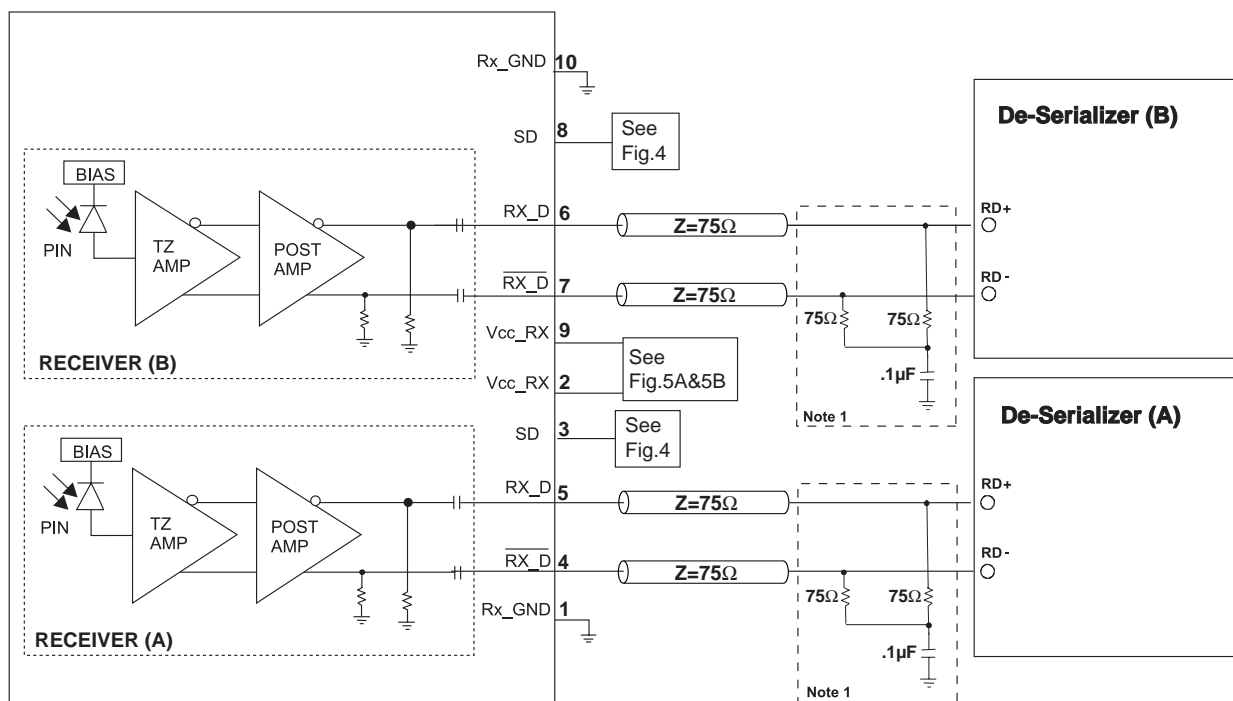


Figure 2. Alternative RECEIVE Data Terminations

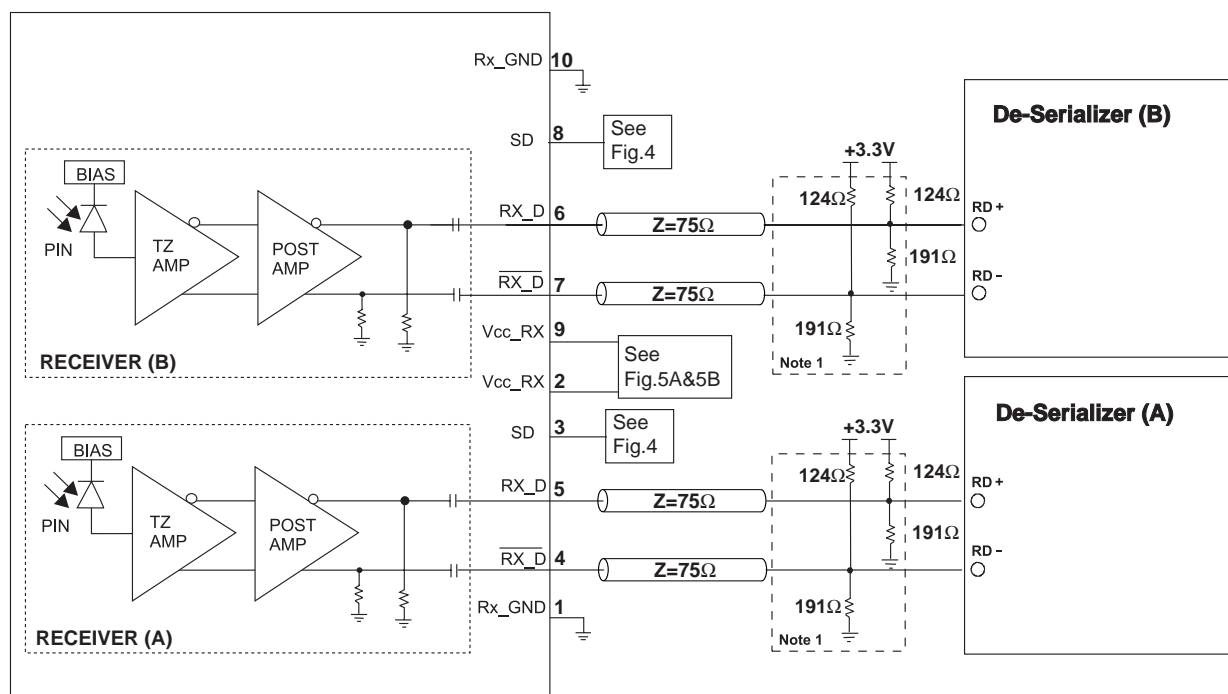


Figure 3. Thevenin Equivalent RECEIVE Data Terminations

Notes:

1. Consult De-Serializer manufacturer's data sheet and application data for appropriate receiver input biasing and termination network.

M2R-25-9-X-TXL Optical Multi-Protocol Video SFF 2x5 Dual Receivers -- 1.5GBaud --- +3.3V



SIGNAL DETECT

The M2T-25 dual receivers are equipped with TTL signal detect outputs. The standard TTL output eliminates the need for a PECL to TTL level shifter in most applications. The SFF adhoc industry standard provides for a TTL level Signal Detect output.


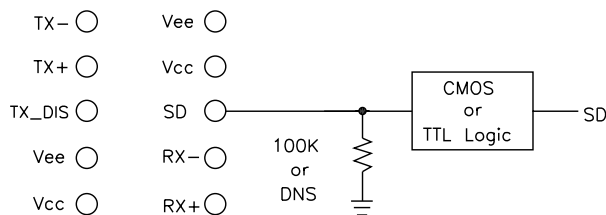


Figure 4. Signal Detect

POWER COUPLING

A suggested layout for power and ground connections is given in figure 5B below. Connections are made via separate voltage and ground planes. The mounting posts are at case ground and should not be connected to circuit ground. The ferrite bead should provide a real impedance of 220 ohms at 100MHz. Bypass capacitors should be placed as close to the 10-pin connector as possible.

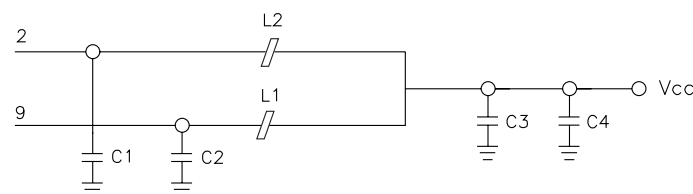

Values:


C1, C2 = 1000pF, COG

C3 = 0.1μF

C4 = 10μF, Tantilum

L1, L2 = Real Impedance of 220Ω @ 100MHz

Figure 5A. Suggested Power Coupling - Electrical Schematic

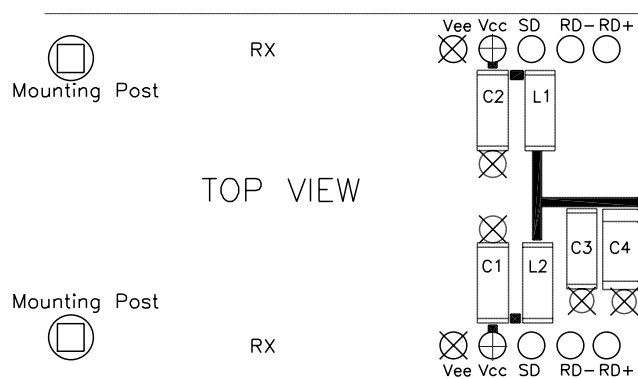

Values:

C1, C2 = 1000pF, COG

C3 = 0.1μF

C4 = 10μF, Tantilum

L1, L2 = Real Impedance of 220Ω @ 100MHz

Note:

(1) Components shown are placed on the bottom layer and are viewed through the board.

LEGEND:

⊕ Vcc Plane Connection
⊗ Circuit Ground Connection
⊙ Case Ground

Figure 5B. Suggested Power Coupling - Component Placement

M2R-25-9-X-TXL Optical Multi-Protocol Video SFF 2x5 Dual Receivers -- 1.5GBaud --- +3.3V




EMI and ESD CONSIDERATIONS


Stratos Lightwave optoelectronic dual receiver modules offer a Metalized plastic case and special chassis grounding clips. As shown in the drawing, grounding clips connect the module case to chassis ground when installed flush through the panel cutout. The grounding clip in this way brushes the edge of the cutout in order to make a proper contact. The use of a grounding clip also provides increased electrostatic protection and helps reduce radiated emissions from the module or the host circuit board through the chassis faceplate. The attaching posts are at case potential and may be connected to chassis ground. They should not be connected to circuit ground.

Plastic optical subassemblies are used to further reduce the possibility of radiated emissions in multimode dual receiver module. By providing a non-metal receptacle for the optical cable ferrule, the gigabit speed RF electrical signal is isolated from the connector area thus preventing radiated energy leakage from these surfaces to the outside of the panel.

MECHANICAL DIMENSIONS

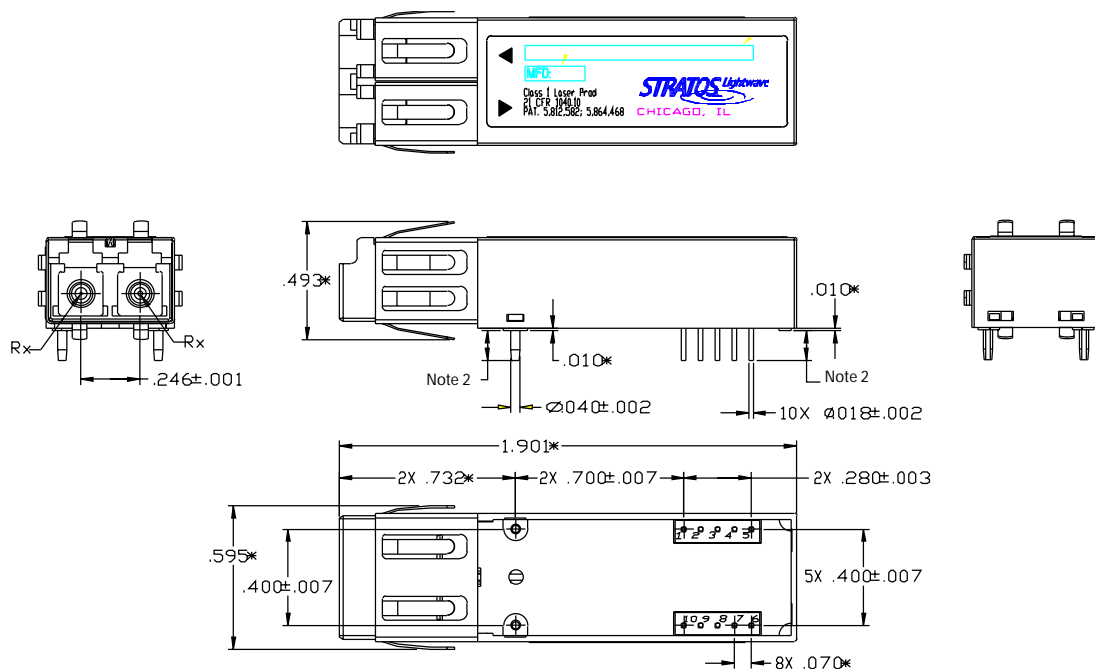


PANEL CUTOUT DIMENSIONS

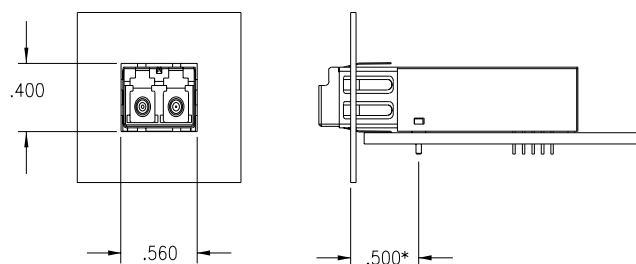

*DIMENSION REFERRED TO OUTSIDE WALL

SUGGESTED PCB LAND PATTERN

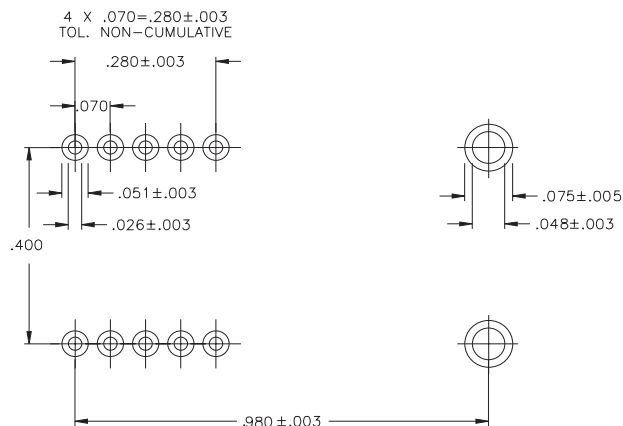

M2R-25-9-X-TXL Optical Multi-Protocol Video SFF 2x5 Dual Receivers -- 1.5GBaud --- +3.3V



PHYSICAL DESCRIPTION

The M2R-25 features a compact design with a standard LC duplex connector for fibre optic connections. The 10-pin connector (70 mil spacing) provides the electrical connection for all operation. With a height of 9.8 mm the M2R-25 fits mezzanine card applications. Two wave-solderable posts are provided for attaching the package to the circuit board without the need for multiple attachment operations.

ELECTRICAL INTERFACE, PIN DESCRIPTIONS

PIN 1	RX_GND	Ground. (A)
PIN 2	Vcc_RX	+3.3 volt supply for the Receiver Section . (A)
PIN 3	SD	Receiver Signal Detect TTL output. Active high on this line indicates a received optical signal. (A)
PIN 4	- RD	Receiver Data Inverted Differential Output . (A)
PIN 5	+RD	Receiver Data Non-Inverted Differential Output (A)
PIN 6	+RD	Receiver Data Non-Inverted Differential Output (B)
PIN 7	- RD	Receiver Data Inverted Differential Output (B)
PIN 8	SD	Receiver Signal Detect TTL output. Active high on this line indicates a received optical signal. (B)
PIN 9	Vcc_RX	+3.3 volt supply for the Receiver Section (B)
PIN 10	RX_GND	Ground. (B)
Attaching Posts		The attaching posts are at case potential and may be connected to chassis ground. They should not be connected to circuit ground.



Optoelectronic Products

7444 West Wilson Avenue • Chicago, IL 60656
(708) 867-9600 • (800) 323-6858 • Fax: (708) 867-0996
email:optoinfo@stratoslightwave.com
<http://www.stratoslightwave.com>

IMPORTANT NOTICE

Stratos Lightwave reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance. Stratos Lightwave advises its customers to obtain the latest version of the publications to verify, before placing orders, that the information being relied on is current. Stratos Lightwave Small Form Factor (SFF) products are covered under U.S. Patent Numbers 5,812,582 and 5,864,468.

Stratos Lightwave warrants performance of its optical link products to current specifications in accordance with Stratos Lightwave standard warranty. Testing and other quality control techniques are utilized to the extent that Stratos Lightwave has determined it to be necessary to support this warranty. Specific testing of all parameters of each optical link product is not necessarily performed on all optical link products.

Stratos Lightwave products are not designed for use in life support appliances, submarines, military, flight hardware, devices, or systems where malfunction of a Stratos Lightwave product can reasonably be expected to result in a personal injury. Stratos Lightwave customers using or selling optical link products for use in such applications do so at their own risk and agree to fully indemnify Stratos Lightwave for any damages resulting from such improper use or sale.

Stratos Lightwave assumes no liability for Stratos Lightwave applications assistance, customer product design, software performance, or infringement of patents or services described herein. Nor does Stratos Lightwave warrant or represent that a license, either expressed or implied is granted under any patent right, copyright, or intellectual property right, and makes no representations or warranties that these products are free from patent, copyright, or intellectual property rights.

Applications that are described herein for any of the optical link products are for illustrative purposes only. Stratos Lightwave makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.